

NVx Gas Unit Heater Range

Controlling your working environment

HEATING • VENTILATION • INTEGRITY



Authorised User No. 00175



Duties

Model		10	15	20	25	30	40	50	60	75	90	120	140	
Output		kW	10	15	20	25	30	40	50	60	75	90	120	140
Electrical	Standard	V/ph/Hz	230/1/50											
	Optional	V/ph/Hz	415/3/50											
Overall Dimensions	Height	mm	540	540	540	540	760	760	912	760	912	700	831	975
	Width	mm	785	1000	1000	1000	1000	1000	1000	1325	1325	2325	2325	2325
	Depth	mm	700	700	700	700	700	700	700	700	700	700	700	700
Flue Diameter		mm ø	80	80	80	80	100	100	100	130	130	130	130	130
Nett Weight		kg	53	54	68	89	89	93	114	130	150	188	260	260

Nett weights are for NVx Freeblowing models only

Introduction


Warm air heating provides an efficient, flexible and cost effective solution for the heating of most industrial and commercial buildings.

Powrmatic have been a leading manufacturer of warm air heating products for more than sixty years. Integrity of design and quality of manufacture are characteristics inherent in each and every product.

Peace of mind is assured with Powrmatic's comprehensive guarantee package which includes a two year parts and one year labour guarantee, as well as a TEN year heat exchanger warranty.

Areas where special consideration or advice may be required include (but is not limited to) areas where solvents, styrenes are used or paint spraying is carried out. Also where airborne silicone is present, where petrol engined vehicles are stored or maintained, or where dust is present (e.g. joinery workshops) Installation in such areas may be possible under specific conditions. Please consult with your preferred contractor for further information

Efficiency

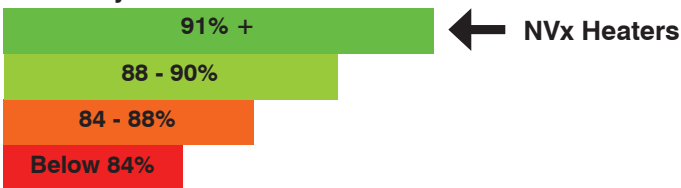

Heritage Heating & Cooling Ltd
 Unit 34G, Albion Road
 Sileby, Loughborough
 LE12 7RA

tel: +44 (0) 1509 814 123
 fax: +44 (0) 1509 814 325
 e-mail: sales@heritageheatingandcooling.co.uk
 web: www.heritageheatingandcooling.co.uk



Powrmatic pursues a policy of continuous improvement in both design and performance of its products and therefore reserves the right to change, amend or vary specifications without notice. Whilst the details contained herein are believed to be correct they do not form the basis of any contract and interested parties should contact the Company to confirm whether any material alterations have been made since publication of this brochure.

NVx Gas Unit Heaters are designed for suspended off the floor space saving location and clean lines with a fully housed burner. Capable of being operated in room sealed or conventional flue mode flues can discharge either vertically or horizontally saving expensive roof works. Models suitable for natural gas or lpg firing. All heaters are finished with a durable epoxy powder coat paint finish which is stove hardened.

Combustion Chamber/Heat Exchanger tube manipulated assembly designed to combine thermal efficiency with long-lasting service life. Life cycle tested and warranted for ten years.

Fuel Efficiency and Low Carbon Emissions underpin the heater design with all models meeting current Part L2B Building Regulations and meeting the exacting criteria of the Government's Enhanced Capital Allowance scheme.

Time and Temperature Controls fully compatible with NVx heaters can be optionally supplied to provide automatic operation. Control stations are supplied loose for convenient low level mounting with customers selecting either the easy to set Powrtrol, or the code protected optimised start/stop MC200bl. Both control systems include as standard, day thermostat, frost protection thermostat, programmable time switch and fan only switching to facilitate summer air movement.

MC200bl must be used for ECA scheme eligibility